
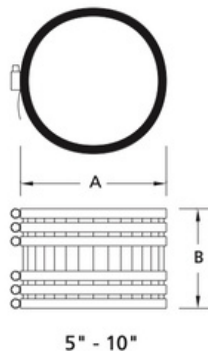


Husky SD 4000 Coupling

The Husky SD 4000 Coupling is a super-duty, all-stainless-steel pipe coupling designed to securely join No-Hub cast iron soil piping. Manufactured with a wider shield (304 Stainless steel) and extra clamps to distribute load and reduce joint movement for extra rigidity.

It features a robust corrugated shield and multiple sealing clamps to ensure a rigid and leak-resistant joint. The high-purity neoprene gasket has a double sealing zone, withstands high liquid temperatures up to 100°C/212°F and does not support flame.

Size	Qty / Box	A	B
1 ½ × 1 ½ 38 × 38	60	2 ¼ 57	3 76
2 × 2 50 × 50	75	2 ¾ 70	3 76
3 × 3 75 × 75	48	3 ¾ 95	3 76
4 × 4 100 × 100	48	4 ¾ 121	3 76
5 × 5 125 × 125	15	5 ¾ 146	4 102
6 × 6 150 × 150	15	6 ¾ 171	4 102
8 × 8 200 × 200	15	8 ¾ 222	4 102
10 × 10 250 × 250	12	10 ¾ 273	4 102



No-hub couplings are available in sizes from 1 ½" to 15" in diameter.

Certified to CSA B70 & B602 and listed to CAN/ULC S-102.2-10



The clamp bands require 80 in-lbs. of torque. The proper sealing sequence must be followed.